


16F MPO-CS Cassette

16F MPO-CS Cassettes are used to break out the 16F MPO Connectors terminated on trunk cables into CS connectors to facilitate patching into the SR2-100G system equipment ports.

The module is used together with 1HU, 2HU and 4HU HD-Fiber Distribution Frame.

The CS adaptor panel in the front of the module box is used for connecting the equipment or between the module box, and MPO adapter at rear is used for connecting MPO pre-connected trunk cables.

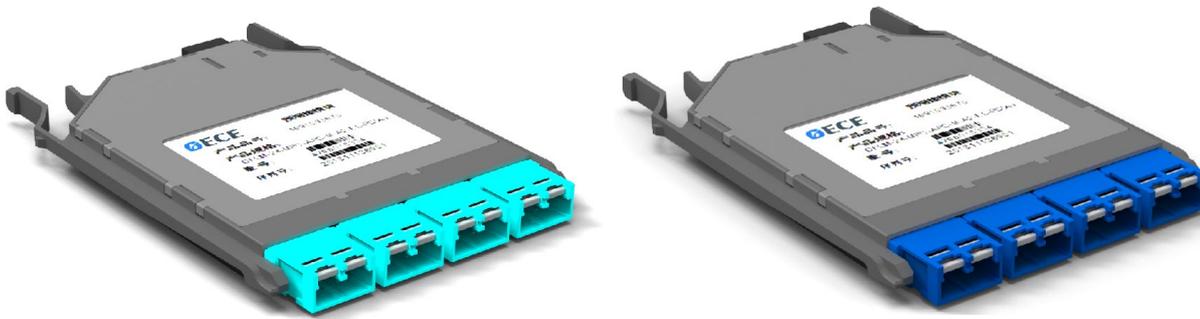

Features & Benefits

- The front panel of the module box is equipped with 4*4C CS adapters, and the rear panel is equipped with the MPO adapter ports which can be equipped with the 16F MPO adapter
- The module box can be installed or removed from the front or rear of HD-Fiber Patch Panel.
- Density with CS interface: 192F for 1HU;384F for 2HU; 768F for 4HU.
- 100% pre-termination to ensure the low insertion loss for demanding high-speed networks.

Optical Performance

	Multimode Standard	Multimode Low Loss	Single-mode Standard	Single-mode low loss
Insertion Loss	0.3dB Typical 0.60dB Maximum	0.2dB Typical 0.35dB Maximum	0.35dB Typical 0.7dB Maximum	0.25dB Typical 0.45dB Maximum
Optical Return Loss	> 20dB	> 20dB	> 60dB (8° Angle Polish)	> 60dB (8° Angle Polish)

Dimensions:

130×90×11.7mm

